




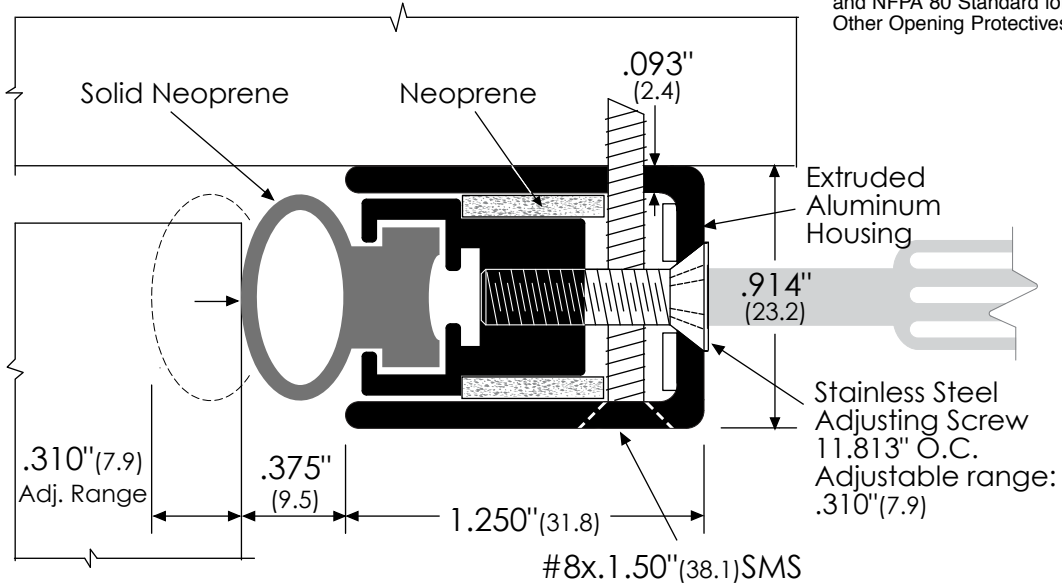


FIRE RATING

-  UL listed
-  10B Classified up to 45 minutes
-  10C Classified
-  Category G Listed up to 20 minutes

SMOKE PERFORMANCE

 The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives



ANSI/BHMA

Legend:

AA = Clear Anodized
D = Dark Bronze Anodized

Head & Jamb #770AA / 770D R3B264
R3B204



415 Concord Avenue tel: 718.585.3230
Bronx, NY 10455 fax: 718.292.2243
email: zero@zerointernational.com
web site: www.zerointernational.com

Part No:
770

Notes:

Part Description:
Adjustable Sealing System
- STC Rated

Provided By:

Customer Name:

Job No:

Date: